

# Inquiry form

offerteam@swfkrantechnik.com

Company: \_\_\_\_\_

Date: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Tel: \_\_\_\_\_


eMail: \_\_\_\_\_

Fax: \_\_\_\_\_

## Information required for the desired components

Bridge crane / Monorail

Light crane system

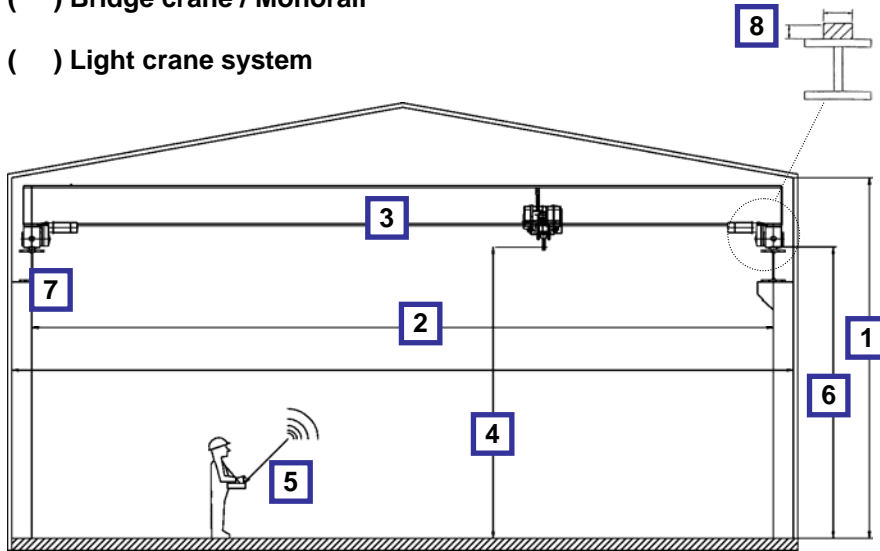

## Building dimensions

- 1** Building height: \_\_\_\_\_ mm
- 2** Crane span / Monorail length: \_\_\_\_\_ mm
- 3** Beam width: \_\_\_\_\_ mm
- 4** Lifting height: \_\_\_\_\_ mm
- 5** Remote control: yes ( ) no ( )
- 6** Top edge height of crane rail: \_\_\_\_\_ mm
- 7** Runway rail length: \_\_\_\_\_ mm
- 8** Runway rail: \_\_\_\_\_ x \_\_\_\_\_ mm

### Crane type

- Single girder crane
- Double girder crane
- Underslung crane
- Monorail

### Safe working load

\_\_\_\_\_ kg

\_\_\_\_\_ kg

\_\_\_\_\_ kg

\_\_\_\_\_ kg

### Hoist

- Chain hoist
- Wire rope hoist

### Power supply

400 V / 50 Hz ( ) \_\_\_\_\_ V / \_\_\_\_\_ HZ ( )

### Control voltage

48 V ( ) 115 ( ) 230 V ( )

### Duty group

Fem: 1Bm (M3) ( ) 1Am (M4) ( ) 2m (M5) ( ) 3m (M6) ( )

### Hoist power feeding line

Flat cable ( ) Energy chain (Remote Control needed) ( )

## Ambient conditions

### Utilisation

indoors ( ) outdoors under roof ( ) outdoors ( )

### Ambient temperature

+5°C bis +40°C ( )

From -20°C ( ) -10°C ( ) 0°C ( ) up to +40°C ( ) +55°C ( )

High humidity  $\geq 90\%$  ( ) Dusty (non explosive) ( )

### Explosion proofed



Gas Zone 1 IIB T4 ( ) Zone 1 IIC T4 ( ) Zone 2 IIB T3 ( ) Zone 2 IIC T3 ( )

Dust Zone 21 IP65 T+135°C ( ) Zone 22 IP55 T+155°C ( )

### Additions for

### Light Crane System

ProfileMaster ( ) LIGHTster ( )

Suspension distance \_\_\_\_\_ mm Suspension type \_\_\_\_\_